

Bulkhead and Panel Mounted Jack-Jack Adapters (Connect two plugs)

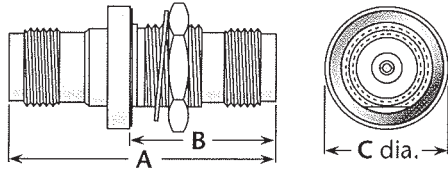


Figure 1
(Bulkhead mount)

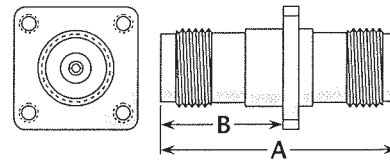


Figure 2
(Panel mount)

Figure	Dimensions			Max. Panel	Mounting Figure	Plating		Delta P/N
	A	B	C			Body	Contact	
1	1.28	.80	.625	.16	59	Nickel	Gold (C)	1226-000-N591-1
1	1.39	.76	.69	.19	59	Nickel	Gold (C)	1226-000-N598-2*
2	1.28	.69	—	—	07	Nickel	Silver (C)	1225-000-N070-1

* Hermetically sealed, with mounting gasket.

Straight Adapters




Figure 1
(Straight jack-jack;
connects two plugs)




Figure 2
(Straight plug-plug;
connects two jacks)




Figure 3
(Straight jack-plug;
connects one plug and one jack)

Figure	Dimensions		Plating		Delta P/N
	A	B	Body	Contact	
1	1.28	.44	Nickel	Silver (C)	1228-000-N000
2	1.25	—	Nickel	Gold (C)	1227-000-N000
3	1.22	—	Nickel	Gold (C)	1234-000-N000

(C) in contact plating column indicates captive contact. • See page 6 for alternate body plating information.
See page 203 for mounting dimensions.